
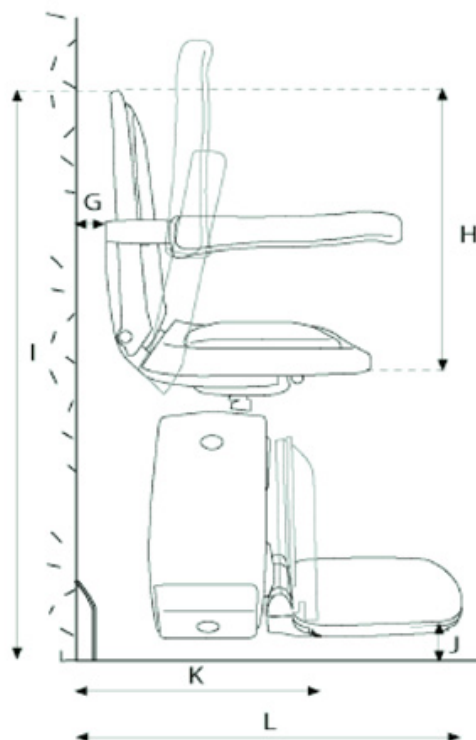


Technical Specification for 120 Superglide

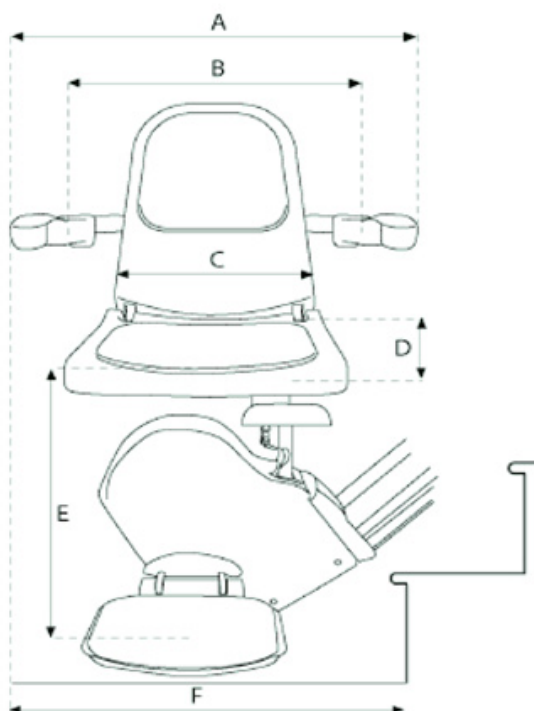

DIMENSIONS

	mm	inch
A - Width outside armrests	560	22
B - Width inside armrests	445	17.5
C - Width of backrest	370	14.5
D - Depth of seat	410	16
E - Top of footrest to top of seat	445	17.5
F - Required space from bottom of stair	660	26
G - Wall to Seat width	40	1.5
H - Overall height of seat	495	19.5
I - Overall height	1020	40
J - Footrest surface to floor	115	4.5
K - Overall depth (folded)	325	13
L - Overall depth (footrest down)	585	23

WIDE SEAT OPTION

B - Width inside armrests	520	20
F - Required space from bottom of stair	710	28
D - Depth of seat	410	16

SPECIFICATIONS

Motor Power	0.5 hp
Travel Speed	No greater than 0.15m/s
Method of Drive	Rack and Pinion
Motor Output Torque	108 Nm
Power Supply	24v DC (battery)
Maximum Capacity	294 lbs (optional 350lbs)
Track	Extruded Aluminium
Mains Supply	110v, 1.5amp Charger

ACORN, in keeping with its policy of continual development, reserves the right to change specifications without notice. All measurements are approximate.

